

Innovating
your business

Industrial
Scalability

Flexo-like
productivity


TAU RSC PLATFORM

Maintaining a
competitive edge

Resolution
Speed
Color

LABEL & FLEXIBLE
PACKAGING

durst

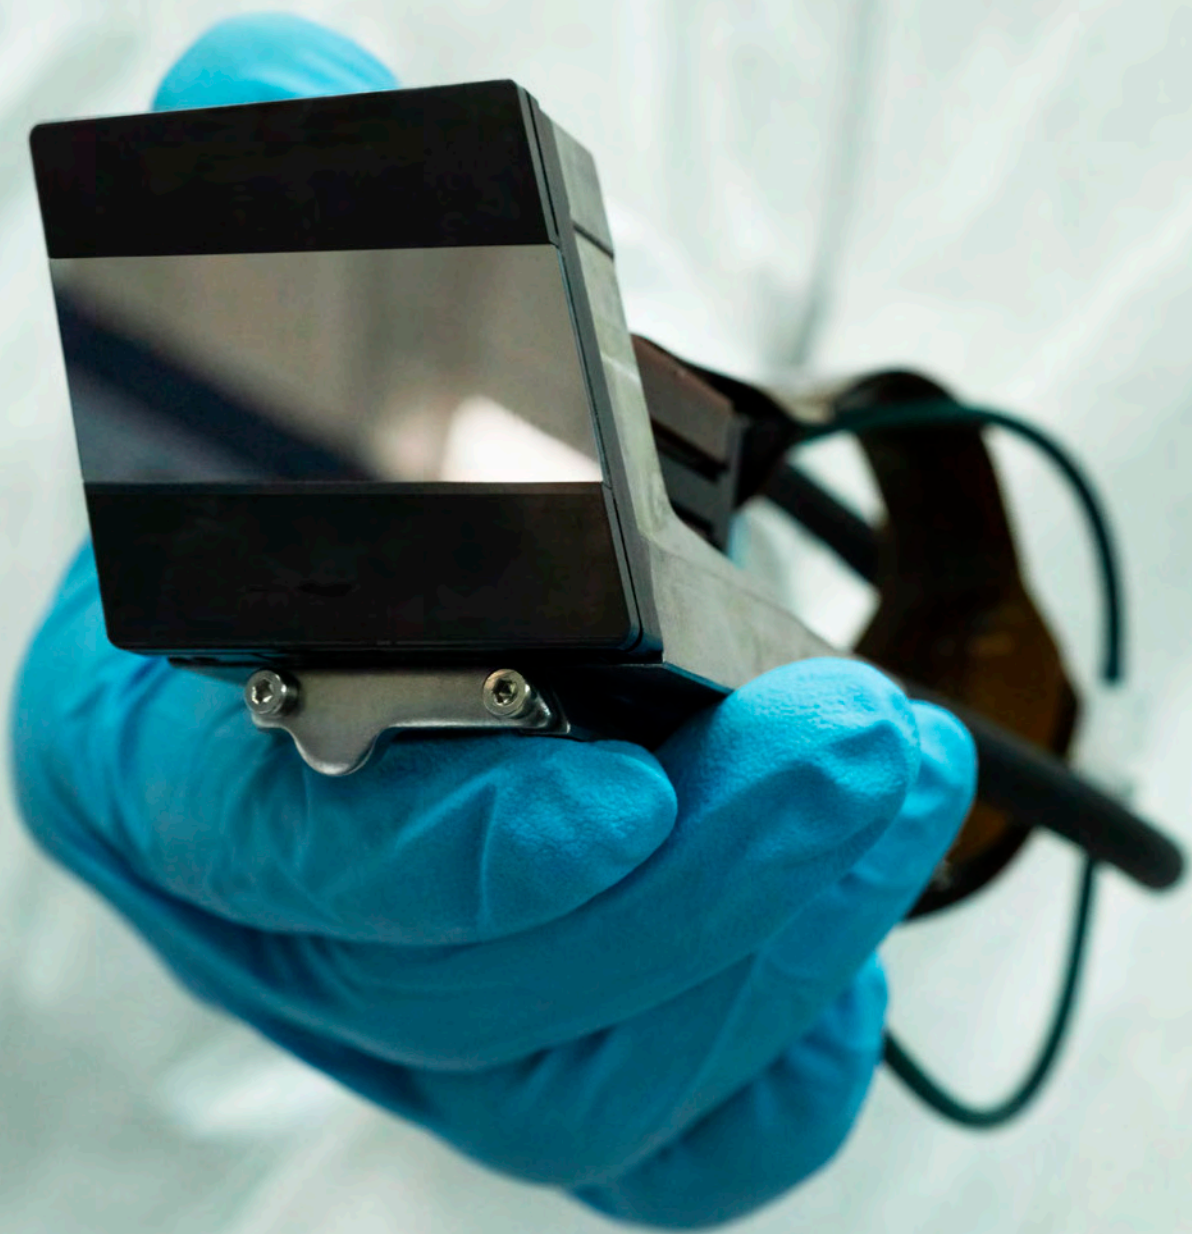

ALL YOU NEED IS RSC

CONTENT

1. TAU RSC PRINTING SYSTEMS	4	3. APPLICATIONS	20
TAU 330 RSC E	6	4. DURST SOFTWARE ECOSYSTEM LABEL	22
TAU 330 RSC	8	5. INTEGRATION & CONSULTANCY	25
TAU RSCi	10		
TECHNICAL OVERVIEW	12		
TAU RSCi FLEX0 STATION	14		
2. TAU RSC INKS	16		
TAU RSC UV INK	18		
TAU RSC LOW MIGRATION UV INK	19		

1

TAU RSC PRINTING SYSTEMS

Introduced at Labelexpo 2017, the Tau RSC platform sets a new benchmark in industrial digital UV inkjet label printing. Best in class quality and productivity, combined with highest uptime, result in a competitive package with lowest total cost of ownership.

RSC

```
graph TD; RSC --- Resolution; RSC --- Speed; RSC --- Color;
```

RESOLUTION
UP TO

1200

DPI @ 2 PL

SPEED
AT FULL RESOLUTION UP TO

80

M/MIN

COLOR
PANTONE COVERAGE UP TO


95%

CMYK OVG WITH dE00<2

SPECIAL FEATURES

BEST IN CLASS PRINT HEAD: DIMATIX SAMBA G3L

- > Durable design based on MEMS print head technology
- > Full 1,200 x 1,200 dpi resolution
- > 2 pl minimum drop size for smooth gradients and absolute sharpness
- > Automated nozzle compensation for increased press uptime and reduced service costs

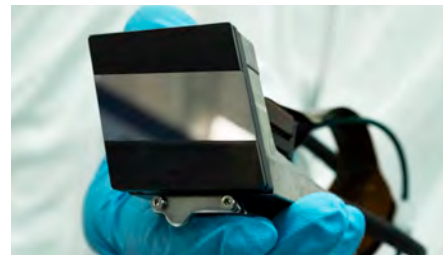

TAU RSC INKS

- > Tau RSC UV inks
- > BS5609 and UL compliance achieved, excellent light fastness and heat resistance for outdoor applications
- > Tau RSC Low Migration UV inks for food and pharmaceutical applications



AUTOMATIC PRINT HEAD CLEANING

- > Reduces time for daily maintenance
- > Ensures high up time



PRECISE TEMPERATURE CONTROL

- > Closed and protected print engine for maximum printing stability
- > Heating and cooling of Tau RSC inks to maintain color consistency



PROPRIETARY ELECTRONICS

- > Ensures highest productivity
- > Allows to print variable data at 80 m/min with all colors



SOLID MACHINE CONSTRUCTION

- > In-house manufacturing of key components
- > Designed for 24/7 operation



TAU 330 RSC E — EVOLVES YOUR BUSINESS

Equipped with latest RSC technology, the Tau 330 RSC E combines best in class print quality with an economic investment. Fully upgradable to an 8 color Tau 330 RSC with a print speed of 80 m/min guarantees that future increased production capacity requirements are covered.

Customers can choose between the Tau RSC UV inks and Tau RSC Low Migration UV inks.

Attractive TCO

High-pigmented RSC inks

RSC ink sets

RSC UV inks
RSC Low Migration UV inks



Real production speed

52 m/min with all colors incl. white
Variable data printing at full speed

Future proof

Field upgrade possibility to 80 m/min
Ready for additional process colors



Automated nozzle compensation

Inline camera system

TAU 330 RSC — BOOSTS YOUR BUSINESS

The benchmark in productivity and flexibility is the Tau 330 RSC. New added options such as the high-speed white allows operators to print with all colors and white at a speed of 80 m/min.

With the Tau RSC UV inks the press prints labels for various applications: industrial, oil and electronic labels, cosmetics, toiletries and bodycare, wine and spirits, stickers, tubes, commercial labels and many more.

Reliable construction

Proved and experienced design

Vibrant RSC inks

Up to 85 % Pantone coverage
with dE00<2 on HermaPE with CMYK



High-opacity white print mode

Opacity up to 80 %

High-speed white print mode

Print speed with white color up to 80 m/min



Automated nozzle compensation

Inline camera system

TAU RSCi — INNOVATES YOUR BUSINESS

Innovation for an industrial level of productivity. The newest member of the Tau RSC platform is the Tau RSCi. Available in printing widths of 330, 420 or 510 mm the printer is using the Tau RSC UV inks. The press is designed to take over mid- to long run jobs but is also able to produce short-run jobs in the most economic way.

The user-friendly design including jumbo winders and roll lifts allows fast roll changes and good accessibility to print heads, UV-lamps and transport rollers. The integrated large inspection table provides space for visual inspection. The Tau RSCi is equipped by default with a chill roller to guarantee maximum material and application flexibility.

Highest productivity

Print speed up to 100 m/min

Jumbo winders

For rolls with Ø 1,016 mm
and included roll lift



Industrial scalability

Print width of 330/420/510 mm

RSC print quality

Based on Tau RSC technology



Innovative approach

Front side operation and ink refill

TECHNICAL OVERVIEW

STANDARD SCOPE OF DELIVERY

Print head
Print resolution – native
Minimum drop size – Greyscale levels
Maximum print speed
Print width
Inks
Loading capacity
Substrate width
Substrate thickness
Substrate type

TAU 330 RSC E



Dimatix Samba
1,200x1,200 dpi
2 pl – 3 levels: 2 – 4 – 6 pl
52 m/min (170 ft/min), upgradeable to 80 m/min (262 ft/min)
Max. 244 mm (9.6 in) or max. 330 mm (13 in)
Tau RSC UV ink, Tau RSC Low Migration UV ink
Roll diameter max. 680 mm (26.7 in), max. 120 kg (264 lbs)
Min. 165 mm (6.5 in) – max. 350 mm (13.7 in)
100 µm to 500 µm. With chill roller: *20 µm to 500 µm
Coated and uncoated, supported and unsupported substrates. Paper, white and transparent film, aluminum foil, PP, PE, PVC, PET, BOPP
* only aluminum foil and PET

ADDITIONAL OPTIONS

Web Cleaner
Corona
Insetter sensor
Variable data printing
High-opacity white print mode
High-speed white print mode
Chill roller
Inerting system
External Jumbo winder
Automated nozzle compensation
High-speed color print mode 100 m/min
Inline flexo printing (priming, varnish, color)


Single or double side
Vetaphone
Yes
Yes
Yes
No
Yes
Yes
Yes, for roll loading capacity with a diameter of max. 1,016 mm (40 in) and max. 450 kg (992 lbs)
Yes, manual or automated mode
No
No

SPACE REQUIREMENTS

for standard scope of delivery

ENVIRONMENTAL INFORMATION

Temperature range: 18 °C (64 °F) – 28 °C (82 °F)
Humidity: 40 – 70 %, non condensing

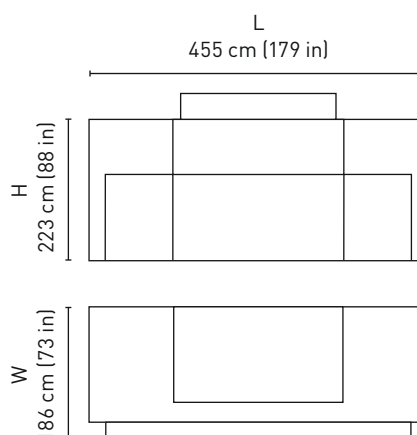


TAU 330 RSC



Dimatix Samba
1,200x1,200 dpi
2 pl – 3 levels: 2 – 4 – 6 pl
80 m/min (262 ft/min)
Max. 330 mm (13 in)
Tau RSC UV ink
Roll diameter max. 680 mm (26.7 in), max. 120 kg (264 lbs)
Min. 165 mm (6.5 in) – max. 350 mm (13.7 in)
100 µm to 500 µm. With chill roller: *20 µm to 500 µm
Coated and uncoated, supported and unsupported substrates. Paper, white and transparent film, aluminum foil, PP, PE, PVC, PET, BOPP
* only aluminum foil and PET

Single or double side
Vetaphone
Yes
Yes
Yes
Yes
Yes
Yes, for roll loading capacity with a diameter of max. 1,016 mm (40 in) and max. 450 kg (992 lbs)
Yes, manual or automated mode
No
No

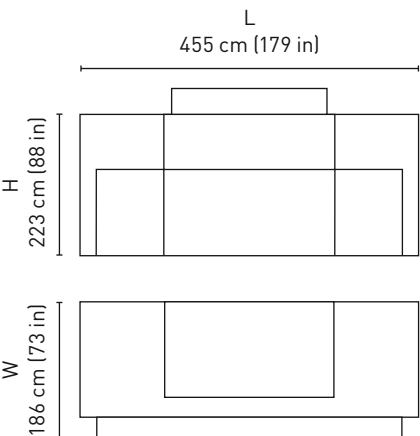


TAU RSCi



Dimatix Samba
1,200x1,200 dpi
2 pl – 3 levels: 2 – 4 – 6 pl
80 m/min (262 ft/min) @ full resolution
Max. 330 mm (13 in), 420 mm (16.5 in), 510 mm (20 in)
Tau RSC UV ink
Roll diameter max. 1,016 mm (40 in), max. 450 kg (992 lbs)
Min. 200 mm (7.9 in) – max. 350/430/520 mm (13.7/17/20.5 in) (depending on printing width)
*20 µm to 500 µm
Coated and uncoated, supported and unsupported substrates. Paper, white and transparent film, aluminum foil, PP, PE, PVC, PET, BOPP
* only aluminum foil and PET

Single or double side
Vetaphone
Yes
Yes
Yes
Yes
Yes
Included in basic configuration
No
Included in basic configuration, for roll loading capacity with a diameter of max. 1,016 mm (40 in) and max. 450 kg (992 lbs)
Included in basic configuration, manual or automated mode
Yes
Yes

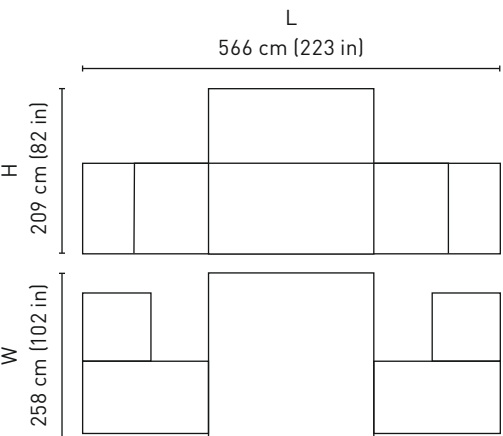

TAU RSCi WITH FLEXO STATIONS — EXPAND YOUR POSSIBILITIES

The Tau RSCi is a real productivity workhorse and it is now possible to configure the Tau RSCi with an optional flexo station before and/or after the digital print unit. The use of challenging materials by adding a primer or combination printing between flexo and UV Inkjet, where for example large solid areas in white are printed in flexo, expand the possible applications even more.

The user friendly flexo stations fit to the available printing widths of 330, 420 or 510 mm of the Tau RSCi and are equipped with a slide in/out carriage to aid loading and unloading of the ink pan, pick-up and anilox roller.

Expand applications

More materials and possibilities

Use of challenging materials

By adding a primer



Proven RSC technology

1200x1200 dpi @ 2 pl drop size

Secure remote access

Special installed hardware




Cost efficient production

Combine Flexo and UV Inkjet

DURST INK TECHNOLOGIES

In accordance with Durst's quality, productivity and environmental standards, the company's ink portfolio comprises various UV ink systems matched to clients needs. Maximum print quality, uptime, and productivity with minimum ink consumption are the result of the continuous and systematic development of the core competencies in mechanical engineering as well as in ink and print-head technology in Durst's innovation center.

This 'magical triangle of inkjet technology' is a holistic approach aimed at providing inks for a wide range of different end uses.

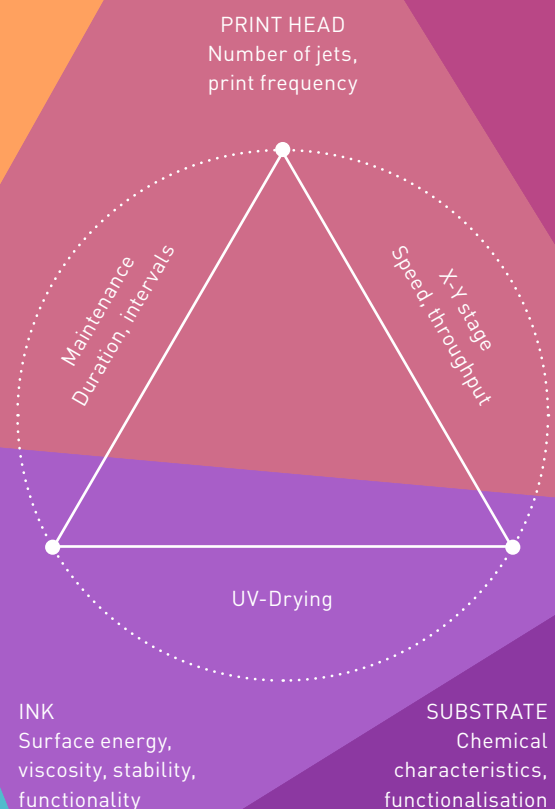

Durst offers dedicated ink systems for the RSC platform to cover a wide range of applications. Durst's development approach and exclusive partnerships with world-leading ink companies, including in-house application and weathering tests, ensures maximum system stability.

All ink systems and production batches are continuously monitored under the strictest laboratory conditions in order to provide optimum performance for users.









- > Large color space
- > High system stability
- > Broad application diversity
- > High pigmentation
- > Low ink consumption
- > Additional process colors

TAU RSC UV INK

With the launch of Tau 330 RSC label press, the new ink set Tau RSC UV ink has been introduced. During development the focus was on excellent flow characteristics and high edge sharpness.

With 7 process colors it is possible to cover up to 95 % of the Pantone color scale and reproduce corporate colors exactly.


Tau RSC UV inks are light-fast and resistant to chemical influences. Tau RSC UV inks are available in Cyan, Magenta, Yellow, Black, Orange, Violet, Green and White. The ink set is used in the Tau 330 RSC E, Tau 330 RSC and the Tau RSCi press.

Color		Light-Fastness/ Blue Wool rating
Cyan		up to 8
Magenta		up to 8
Yellow		up to 8
Black		up to 8
Orange		up to 6 – 7
Violet		up to 8
Green		up to 7 – 8
White		not applicable

- > Automotive
- > Electronics
- > Industrial
- > Commercial labeling
- > Chemicals
- > Personal care

COLOR GAMUT

Comparison between CMYK and CMYK + OVG color profile, created on HERMA PE White TC851

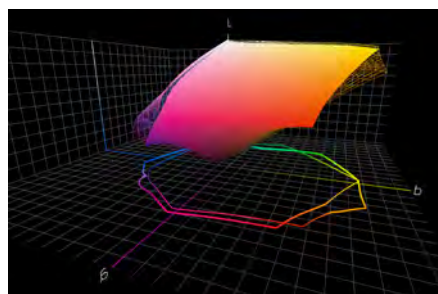

CHARACTERISTICS

- > Durst has obtained UL recognitions for the Tau RSC inks in combination with several self-adhesive materials
- > BS5609 section 3 certification achieved
- > High resistance to sunlight, rain influence, temperature and chemicals

All test and certifications performed together with materials from Avery Dennison.

COMPLIANCE

Tau RSC UV inks comply the following guidelines:








- > REACH
- > SVHC
- > Heavy Metals
- > Mineral oils – MOSH –MOAH
- > RoHs 3
- > VOC
- > and more

For detailed information, please contact your local sales representative or Durst product management team.

TAU RSC LOW MIGRATION UV INK

The new Tau RSC Low Migration inks have been developed specially for applications in the food, beverage, cosmetics and pharmaceutical markets.


The inks have been formulated based on the common regulation and tested and declared as compliant by independent test institutes.

Color		Light-Fastness/ Blue Wool rating
Cyan		8
Magenta		6
Yellow		6
Black		8
Orange		7 – 8
Blue		7
White		not applicable

- > Beverages
- > Food
- > Cosmetics
- > Pharmaceutical
- > Toiletries

COLOR GAMUT

Comparison between CMYK and CMYK + O color profile, created on HERMA PE White TC851

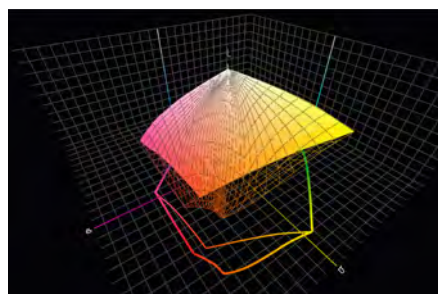

ADHESION CHARACTERISTICS

- > Assessed on a multitude of substrates according to DIN EN ISO 2409:2013. Excellent on typical label substrates suitable for UV inkjet printing
- > Compliant with European Framework Regulation (1935/2004/EC) when utilized in compliant application and environment

For detailed information, please contact your local sales representative or Durst product management team.

COMPLIANCE

- > Nestlé Guidance Note on Packaging Inks (Version August 2016)
- > Swiss Ordinance RS 817.023.021
- > Good Manufacturing Practice (GMP) Printing Inks for Food Contact Materials (4th edition – March 2016) – EUPIA Guidance
- > Latex free
- > Bisphenol A (BPA) and benzophenone are not intentionally added

3

APPLICATIONS

With the printing quality and ink performance provided by the Tau RSC printers, converters are able to cover multiple applications with one printing system in a flexible and economic way, having a choice between RSC and RSC Low Migration ink to address dedicated applications. Thanks to its outstanding performance in productivity and print quality, especially the Tau RSCi is a game changer in transferring flexo jobs onto a digital press platform.

COSMETICS AND TOILETTRIES

Tau RSC provides the highest opacity white, vivid colors and a screen-like feeling of the prints. Patternware add additional value to further enhance the appearance on the shelf.



FOOD AND BEVERAGES

Abrasion resistance and temperature stability is key for these industry applications. Furthermore, the vivid and strong Tau RSC inks will make products stand out. With the new Tau RSC Low Migration inks products can be produced in compliance with general industry regulations and standards.



DURABLES

Tau RSC ink provides outstanding light fastness, temperature and abrasion resistance for durable applications. The ink is very well suited specifically for electronic, oil and lubricant labels. Compliance with UL or BS5609 section 3 for Tau RSC inks is achieved.



VARIABLE DATA PRINTING

Multiple variable elements, such as barcodes, serial numbers or variable text, can be placed together on one label. All variable elements can either be in a single color or printed in multi color at full resolution and full speed of up to 80 m/min. Combined with the high ripping speed of the Durst Workflow Label variable data jobs can be processed fast and efficient.



WINE & SPIRITS


Textured and uncoated substrates for these specific applications deliver a good quality with the high resolution combined with the finest drop-size of the Tau RSC platform printers.



SPECIALITY PACKAGING

In the past, Durst has gained a vast know-how about speciality packaging applications such as blister, tubes, tags, tickets, folding cardboard. The Tau RSC platform printers are able to print on a large variety of substrates and the software solutions offered by Durst Workflow Label ensure an integrated workflow combined with secure handling of sensitive job data. For detailed information please contact your local Durst partner.



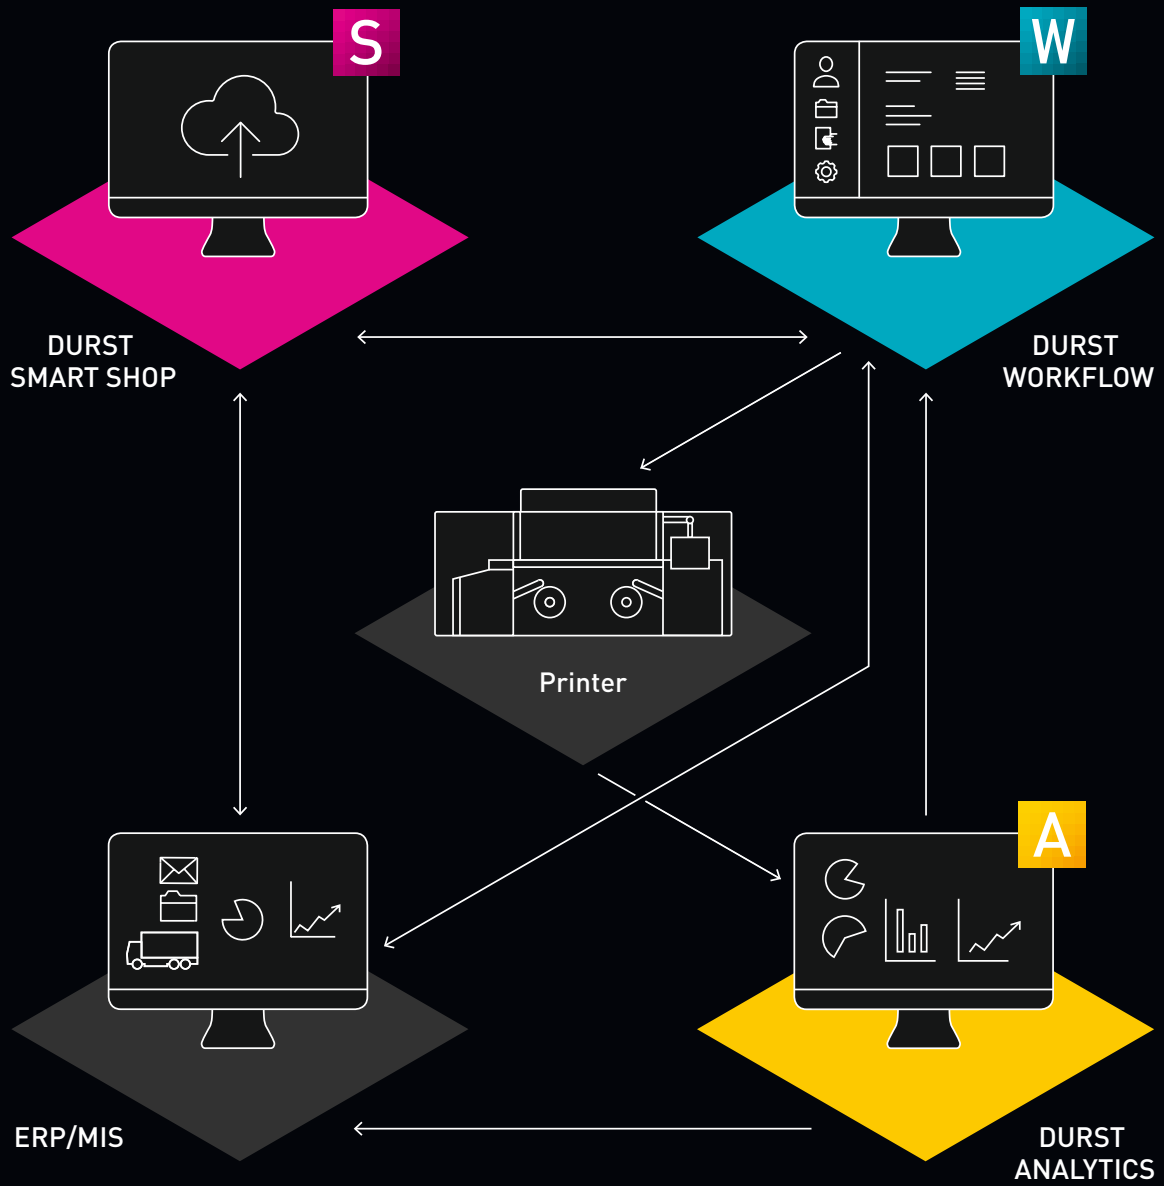

4

DURST SOFTWARE ECOSYSTEM LABEL

All Tau printers are equipped with Durst Workflow Label new software solution and the monitoring tool Durst Analytics. This turns the printer into a production unit from day one.

To integrate e-commerce businesses, Durst offers a scalable solution for B2C and B2B with Durst Smart Shop. All Durst software can be modularly extended and managed with a web-based user interface.



DURST WORKFLOW LABEL

Durst Workflow is a future-oriented, smart, and easy-to-use all-in-one solution for managing and streamlining prepress and production processes. Simple data management, combined with proven technology for color management and ripping, takes productivity to a new level.



DURST WORKFLOW LABEL PLUS

Additional features allow a faster and more flexible preparation of print data. Customizable corrections, a sophisticated color matching toolbox and integration with ERP/MIS systems streamline and automate all processes.



DURST ANALYTICS

Durst Analytics increases transparency in production. The printing system can be monitored at a glance practically from anywhere. A web-based dashboard displays all production data, such as productivity, ink consumption and utilization of the printing systems, over the selected time-span. This allows to identify malfunctions preventively and to minimize downtimes.




DURST ANALYTICS PLUS

The server-based system connects all printers equipped with Durst Analytics for uncomplicated and personalized data export and makes the data available to a production planning or ERP system via our API.

CORE FUNCTIONS

AUTOMATE RECURRING TASKS

To save time and avoid manual intervention as a potential source of errors, recurring tasks and settings can be automated in Durst Workflow Label Plus. Fixup chains and other production-relevant templates can be created, saved, assigned to a hot folder, or triggered fully automatically in the case of integration into a customer's production planning system.

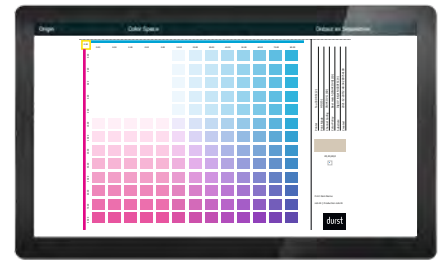

MAP YOUR COLORS

Consistent colors, a precise color reproduction and an individual color adjustment are prerequisites for a smooth production and can be realized easily and effectively with Durst Workflow Label. For example, by reading in the colors of a proof or using grid charts and color books for precise color selection. The defined values can then be stored material or customer-specific.



CUT YOUR COSTS

Intelligent software algorithms of the Save Ink function minimize ink consumption with minimal visual effect in the print item, in order to reduce ink cost and consequently to allow a most cost-efficient production.




SPEED UP THE CREATION OF VARIABLE DATA

Serial numbers and text, images, shapes, colors and over 100 different types of barcodes can be created with the Durst Workflow Label plug-in for Adobe Illustrator. It also provides a live preview of the variable data in the print file. State-of-the-art ripping technology ensures a smooth and fast file processing.



MANAGE APPROVALS WITH FEW CLICKS

Customer approvals are usually created manually in programs such as Adobe InDesign, which takes a lot of time and is also a potential source of errors due to the manual generation. In Durst Workflow Label, approval reports can be created with just a few clicks and additional customer-specific reports can be stored. This not only saves the user a lot of time, but also minimizes the potential for errors and ensures great flexibility.

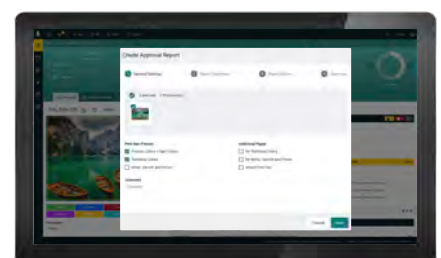

5

INTEGRATION & CONSULTANCY


To capture the full potential of process automation and digitization, it is advisable to integrate leading systems such as ERP, MIS or online stores into existing IT environments at the same time as our software solutions.

Durst Software & Solutions supports and manages these integration projects. There are two service options available:

- > Self-Service-Option: Durst provides standardized interface definitions for the integration of Durst Workflow Plus and Durst Analytics Plus.
- > Full-Service-Option: A professional Durst service expert manages the integration project and ensures the connection to any software interface.

Our qualified consultants and integrators at Durst Software & Solutions will work with you to:

- > Find the best solutions for your needs.
- > Streamline and automate your prepress and printing workflow.
- > Improve your application results.
- > Successfully implement an e-commerce solution, if needed.

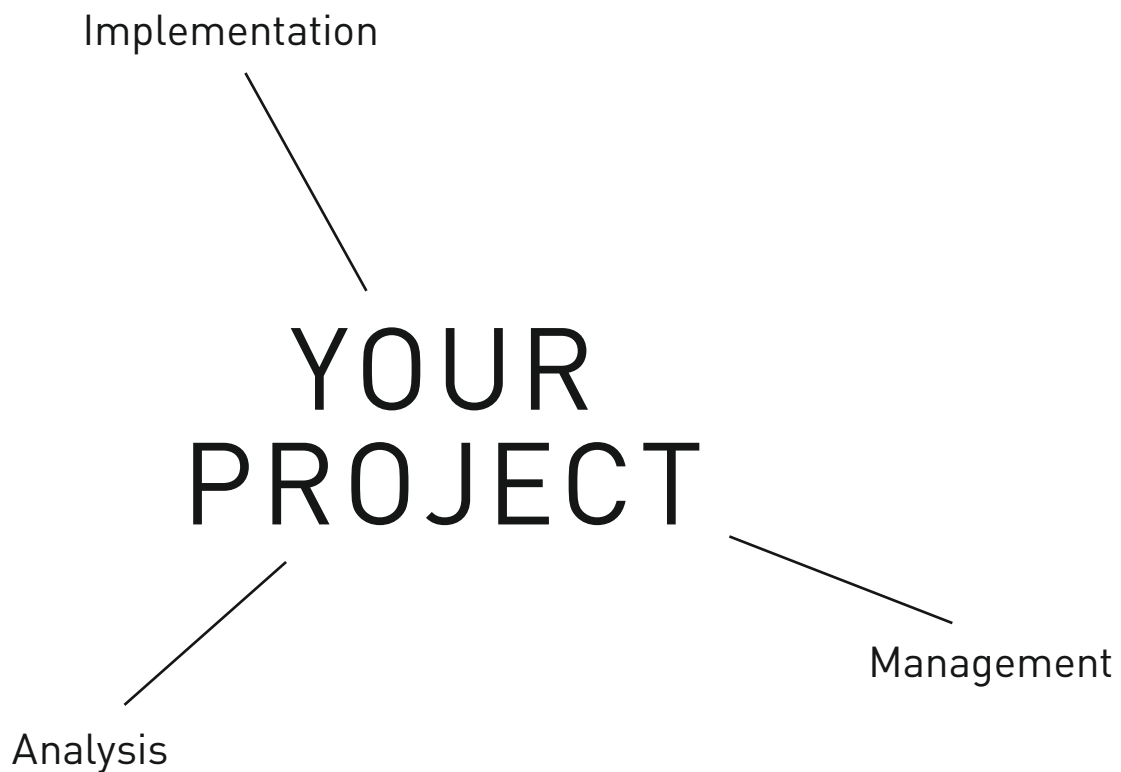

DURST GROUP

We are a manufacturer of advanced digital printing and production technologies with headquarters in Brixen, South Tyrol, Italy. Our core business is digital inkjet printing and the associated ecosystem of printing inks, software and services. We offer holistic solutions in the following business areas:

GRAPHIC BUSINESS	SPECIAL SOLUTIONS	LABEL & FLEXIBLE PACKAGING	NEW BUSINESSES
Large Format Printing Textile Decoration	Ceramics Digital Glaze Industrial 3D	Label Digital Label Hybrid Specialty Packaging	Software & Solutions Corrugated & Folding Carton

OUR CORE VALUES



To earn loyalty and respect from our customers and employees by providing high-tech systems and solutions in the highest quality and by being true to ourselves:

›A little big company with firm roots in Tyrol‹.

Christoph Gamper
CEO & Co-Owner, Durst Group AG





For more information,
please visit

durstus.com/tau-series